





NATIONAL BUREAU OF STATISTICS

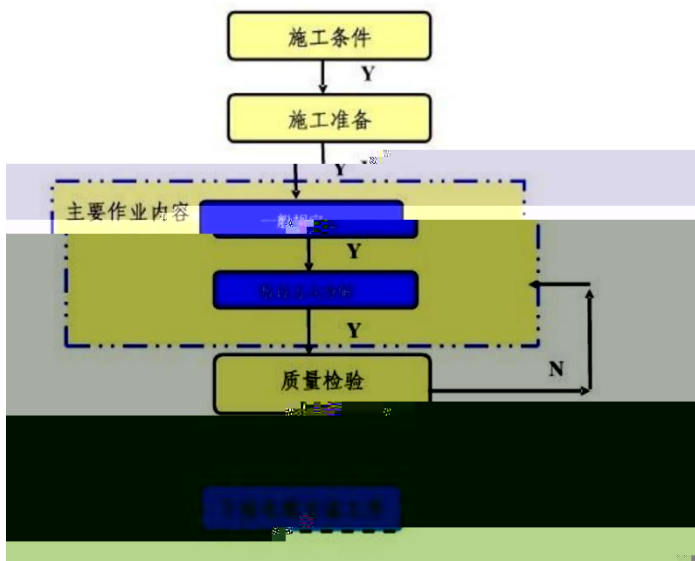

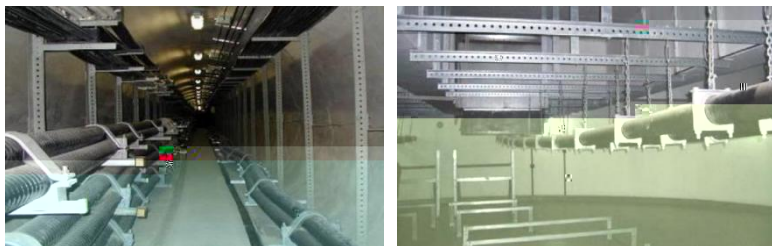

1.

2.

3.

4.

5.

6.

3.

4.

24

5 , 5

5.




6.

7.




1.

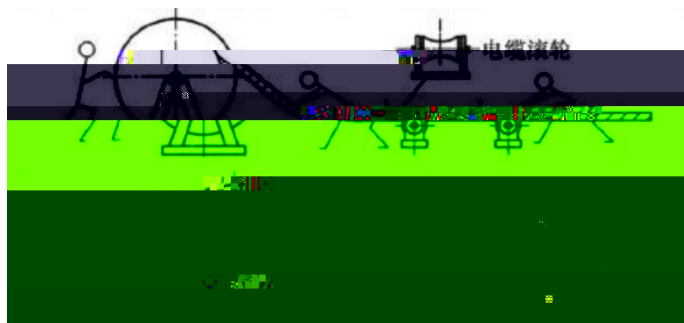


2.


- 输送机启动时，电缆盘应有工协助转动或制动

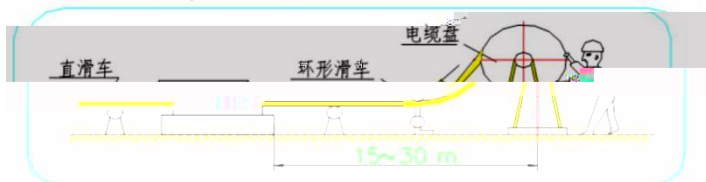


- 在黄、绿两带中，直滑车的运行速度应控制在 1.5~2.0 m/s，环形滑车的运行速度应控制在 1.5~2.0 m/s

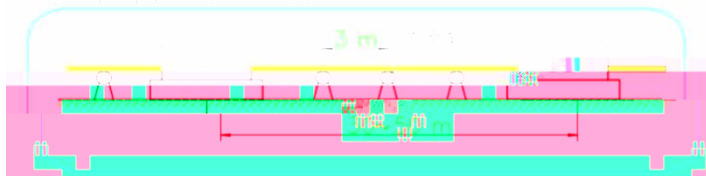


3.

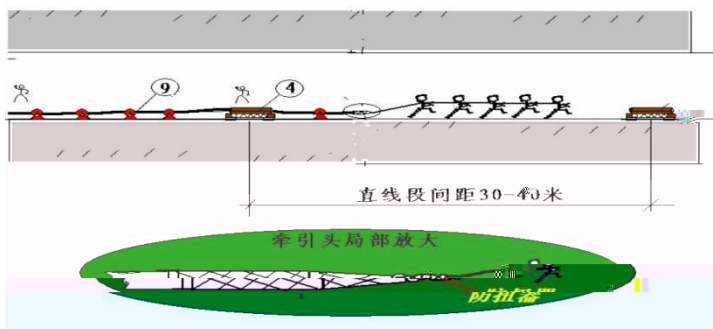


4.

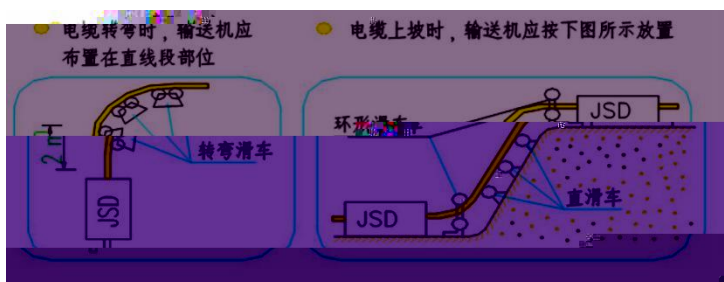



5.

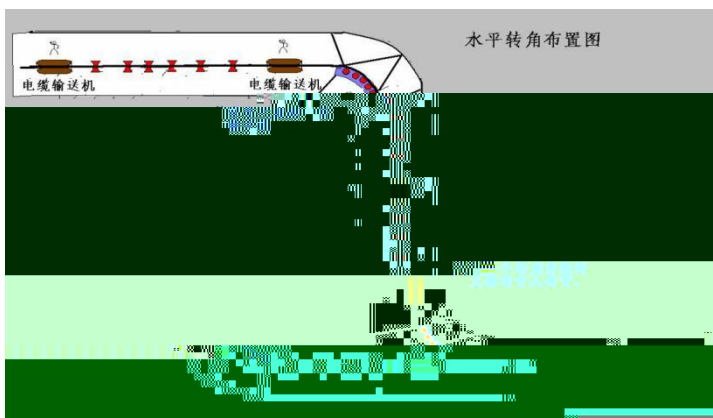

6.

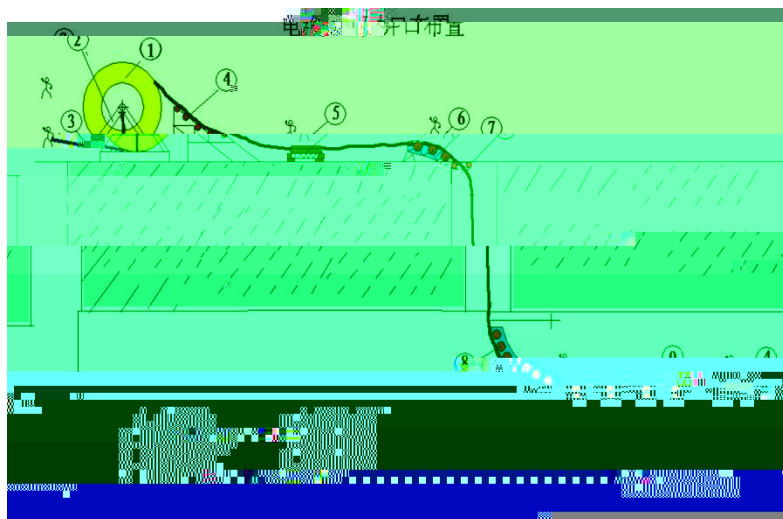

7.



8. 6 10m 3~ 5m

9. S

1.

2.

3.

10m/min

4.

=  $\times 50\text{N/mm}^2$

=  $\times 30\text{N/mm}^2$

3kN/m

5.

6.

7.

8.

9.

2/3

10.

11.


d :

| 66kV-150kV | 35d | 30d | 15d | 20d |
|------------|-----|-----|-----|-----|
| 220kV      | 35d | 30d | 15d | 20d |

12.

13.

1.

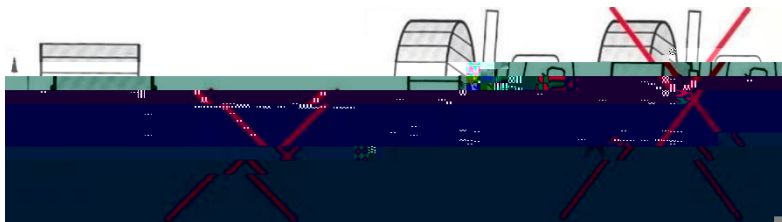

2.

3.

4.

5.

6.

7.

8.

9.